
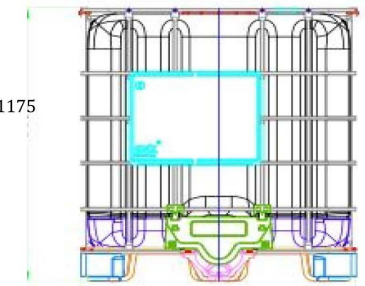


**Product Specification Sheet**

**DESCRIPTION:** 275 GALLON / 1000 LITER, UN, UV STABILIZED HDPE INNER CONTAINER, DN 150 CAP 2" Plug, Plastic pallet INTERMEDIATE BULK CONTAINER (IBC)

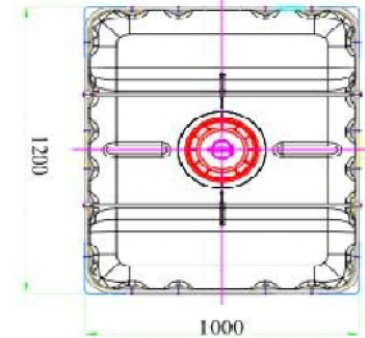

<b>Product Code</b>		<b>GNX- Bulkainers 1000 PP</b>	
<b>Dimensions</b>		LENGTH: 1200 MM (+/-5 MM) X WIDTH: 1000 MM (+/- 5 MM) HEIGHT: 1175 MM ( +/- 5 MM)	
<b>Tare Weight</b>		56.5 KG +/- 5 %	
<b>Material</b>		Galvanized Steel / Polyethylene high density	
<b>Outer container (Cage)</b>		Surface coated steel tubes with special features against extreme vibration stress.6/20 cage resistance welded with extra riveting at all the 20 joints on top horizontal bar along with all vertical members. Also two Restrain Bars are provided on top to support perfect stability. The cage is replaceable. and fitted with Label Plates Corner Protector: 4 pieces, PE-HD, Black	
	<b>Material</b>	Grid / Label plate = Steel, galvanized against corrosion	
<b>Inner container</b>		Rectangular blow molded inner tank High density polyethylene (PE-HD) with top 150 mm filling opening with 70 mm opning in top lid.	
	<b>Material</b>	PE-HD, UV stabilized natural white	
<b>Filling opening</b>		Filling Opening DN 150 with external thread, closed with Black screw cap with 70mm plug Black seal cap.	
	<b>Material</b>	Screw-cap DN 150:	PE-HD, Black
		Gasket in 150 mm plug	EPDM/VITON
		Gasket in 2" plug	PE
		Vent :	Yes with DG vent
<b>Discharge opening</b>		Fitted with Ball valve DN 50 (2") with handle and safety guard. Butress thread on OD. Outlet sealed with an Al- lined PE-foil. Valve closed with screw cap	
	<b>Material</b>	Discharge valve-Body	PE - Black
		Discharge valve-cap	PE - Black
		Neack Gasket	PE
		Ball Gasket	PE
<b>Pallet</b>		Frame type injection moulded plastic pallet, made of high quality PE. Provision of 4 way entry for lifting the IBC.	
	<b>Material</b>	Steel / Plastic (PE)	
<b>Heavy metal content</b>		Content of Lead, Cadmium, Mercury and Chromium below 100 ppm/weight, According EU-directive 94-62 EG	
<b>Printing / UN-marking</b>		31 HA1/Y/...	

**Disclaimer :**  
 Whist every effort is made to reproduce accurate specifications, we reserv the right to change wihtout prior notice. For the lates specification and availblity we ask that you reach your local contact point. All right reserved.